



Dec-Tec Technical Bulletin

Thursday, June 15th, 2017

****INTRODUCING DEC-DT65A ****

Introducing our Dec-DT65A to be used in conjunction with the seaming of our new Natural Line.

Highlights include:


- Dec-DT65A part No. 2.0076
 - ✓ Price Pages have been updated to include this product
- It is a 2 part liquid that is mixed and used to help round the cut edge of the Dec-Tec
 - ✓ This **enhances the longevity and aesthetics of the seam**
- It is applied to all horizontal exposed seams that would see foot traffic over them
 - ✓ Field seams, Dec-Drain seams, the base of columns posts that have Dec-Flash
 - ✓ Spillage or application of Dec-DT65A to any other areas will result in discoloration and damage
- All sales of the Natural Line product **MUST** include the purchase of the Dec-DT65A
 - ✓ Dec-DT65A coverage is 75 linear feet of seamed membrane
 - ✓ In order to receive your warranty on the Natural Line, Dec-DT65A must have been used
- Dec-DT65A is classified as an LVOC product
 - ✓ MSDS sheets are available and will accompany all new order confirmations

Application:

- Each package comes with installation instructions on the back
- Mandatory application to all horizontal exposed seams that would see foot traffic over them
- Optional application to all other areas of seaming
- Application of Dec-DT65A to be done after thermal heat welding



Front and Back of Dec-DT65A Packaging

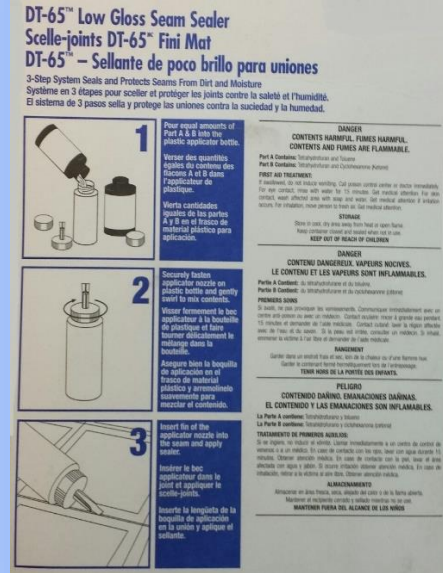

Mixing of Part A and Part B



Application of Dec-D65A



Result / Finish





Dectec[®]

